

## Basic Batch Controller with two control outputs



*Application examples: For basic batching*



*Battery powered batch control*



*Your brand customization*

The basic indicators of the B-Series have all the benefits you may expect from a Fluidwell product: It's durable, reliable and very easy to operate. For more advanced functionality we recommend our D-, E-, F- and N-Series.

### Advantages

- Durable IP65 (Type4) field, wall or meter mount enclosure.
- Intuitive "Know one, know them all!" configuration menu, saving time, cost and aggravation.
- Compact design.
- Competitive pricing in bigger quantities.
- Design your own branded product with several enclosure customization options.

### Features

- Displays preset value and running batch value simultaneously, total and accumulated total.
- Clear 12mm(0.5") numeric and 7mm(0.3") alphanumeric digits.
- All info at a glance with clear alphanumeric display.
- Bright LED backlight.
- The B-In-Control accepts the basic sensor input signals: Reed-switch, Namur, NPN, PNP, Sine wave (coil)
- Two control outputs, for accurate valve control.
- Power requirements: Lithium AA battery and 10 - 30V DC power supply.
- Sensor supply: 8.2V DC.
- Auto backup of settings and running totals.
- One 20mm and two 16mm knock-out hole cable entries.

## Introduction

The B-In-Control is a basic batch controller with two valve control outputs, offering exactly what is required for many applications. The operator can enter a batch quantity easily or execute repeating batches. During the batch, the preset value is displayed as well as the batched (actual) quantity and the units of measurement. The automatic self-learning overrun correction ensures an accurate result after every batch.

## Display

The main process information is displayed with 7 digits (12mm, 0.47") to show the actual batched value, total or accumulated total. The 7 alpha-numeric digits (7mm, 0.28") are used for the preset value and the clear setup menu. For good readings in full sunlight and darkness, the B-In-Control is provided with a bright backlight.

## Configuration

The B-Series uses the same highly appreciated configuration structure of our Fluidwell product series. Each setting is clearly indicated with an alphanumeric description, which avoids confusing abbreviations. Once familiar with one B-series product, you will be able to program all models in all series without a manual. In other words: know one, know them all.

## Control outputs

Two digital outputs are available for accurate valve control. The output is a passive NPN signal.

## Power requirements

Two power inputs are available to supply the B-Series and sensor. The B-In-Control can be powered with a single 3,6V lithium AA battery. The basic 10 - 30V DC power supply can supply the B-In-Control including the backlight and offers an 8.2V DC sensor supply.



All info at a glance



Easy to install



Easy to program



Know one know them all!




Reliable



User-friendly

### Overview application B-In-Control

For basic batching, from small up to very large quantities. Just a simple single batch or repeating similar batches. The B-series offers you an economical solution for common industrial applications. Nothing more, nothing less. For intrinsically safe applications we offer our rugged, field mount F-Series indicators, for explosion proof applications we offer our E-Series indicators, for panel mount applications we offer our D-Series indicators and for advanced batch controllers with numeric keypad we offer our N-Series indicators.

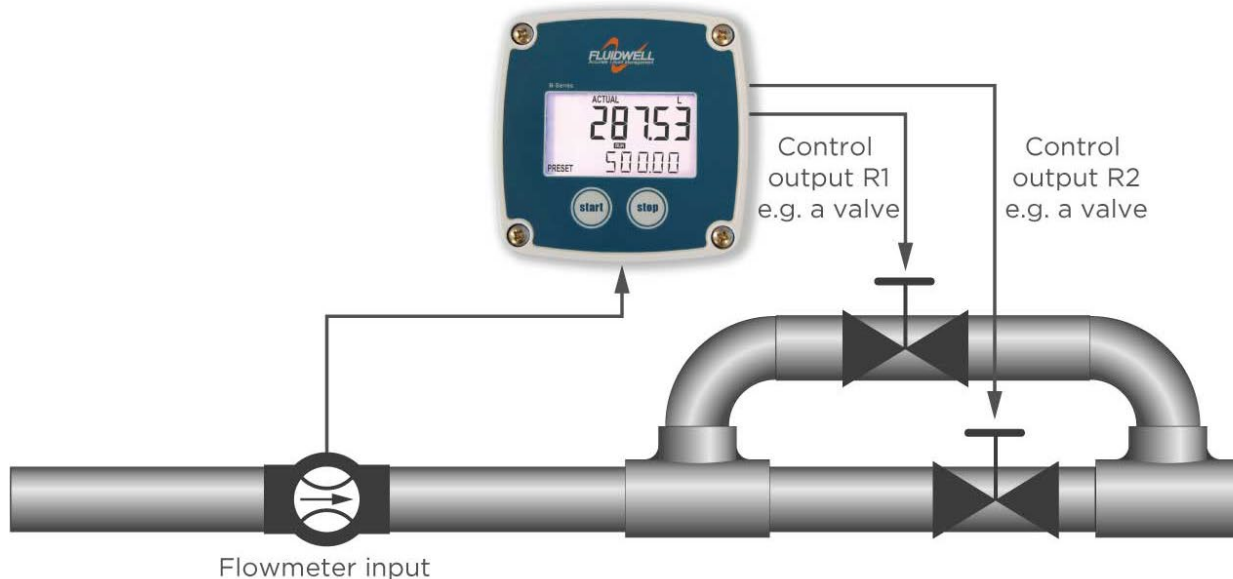

### Signal input

The B-In-Control accepts the basic flowmeter input signals: Namur, Reed-switch, NPN, PNP and Sine wave (coil). The input signal type can easily be selected in the configuration menu.

Type of signal	Resistance	Low Pass filter (LP)	Max. frequency	Max. frequency Low Pass filter (LP)	Min. amplitude p-p	Remark
NPN	100kΩ pull-up		6 kHz Threshold 1.2V			Open collector
REED		1MΩ pull-up		120Hz		
PNP	47KΩ pull-down		6kHz Threshold 1.2V			
NAMUR	820Ω pull-down		4kHz	-		External power required
COIL	-	-		-	90mV <sub>pp</sub>	Default sensitivity

## Enclosures

The smart design of the rugged IP65 (Type4) GRP enclosure ensures optimal advantages for various mounting possibilities.


The B-In-Control can be field or wall mounted or directly on the flowmeter.

The standard enclosure will be delivered as follows:


- Blue GRP back cover.
- White GRP front cover with blue polyester front foil and Fluidwell logo.

## Dimensions enclosure

GRP field mount enclosure

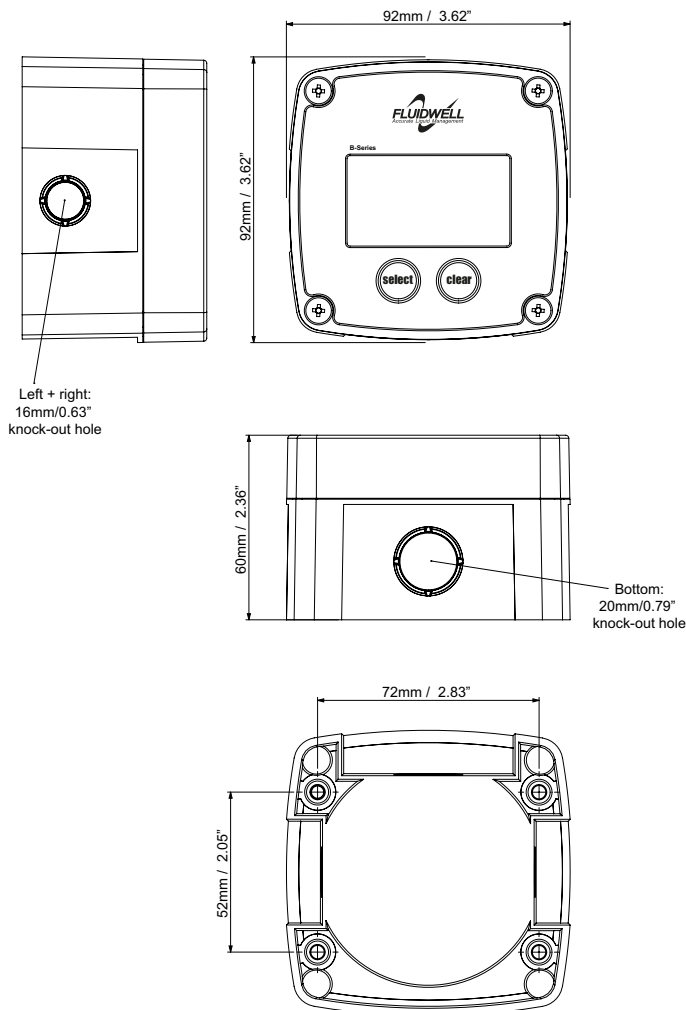

## B-In-Control display example

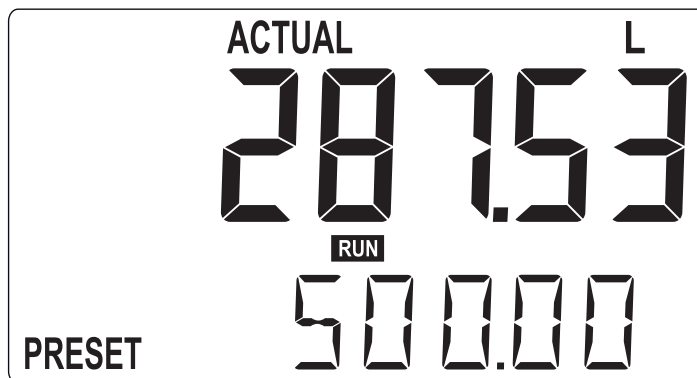


## Customization options

- Fluidwell blue polyester front foil without logo.
- Custom front foil options. (2, 3, 4 or 5 colors).
- Custom front/back cover color.
- Customized manual cover.
- Customized technical label.
- Customized package label.



## Terminal connections B-In-Control

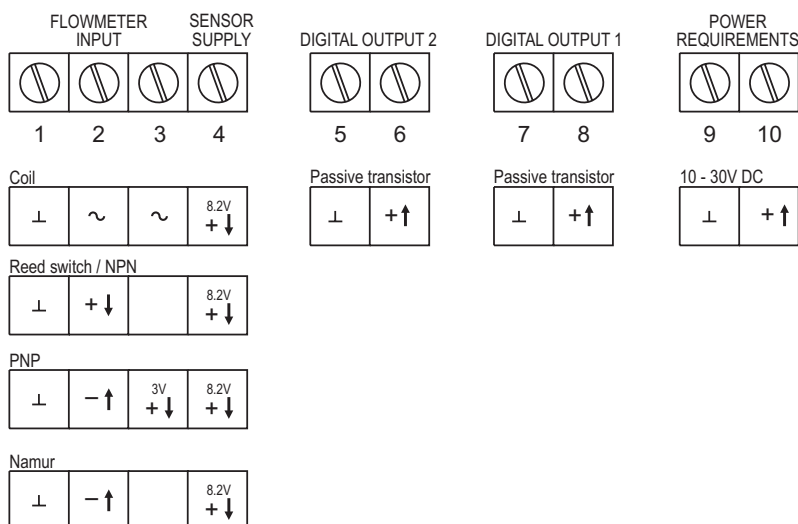

## Display

<b>Type</b>	High intensity transfective numeric and alphanumeric LCD, with white LED backlight.
<b>Dimensions</b>	54 x 29mm (2.13" x 1.14").
<b>Digits</b>	Seven 12mm (0.47") and seven 7mm (0.28") digits Various symbols and measuring units.
<b>Refresh rate</b>	During operation 8 times/sec, it will automatically switch to 1 time/sec after 30 sec without operation.

## Operating temperature

<b>Ambient</b>	-20°C to +60°C (-4°F to +140°F).
----------------	----------------------------------

## Power requirements

<b>Basic supply</b>	10 - 30V DC. Standard consumption: $P_{max}$ 60mW. With backlight: $P_{max}$ 435mW. With backlight + sensor supply: $P_{max}$ 735mW.
<b>Note</b>	The basic power supply will also supply the backlight or the 8.2V DC sensor supply.
<b>Battery</b>	1 x 3.6V AA Lithium battery - life-time depends upon settings and configuration - up to approx. 2 years.

## Sensor excitation

<b>Terminal 3</b>	3V DC for pulse signals and 1.2V DC for coil pick-up, $I_{out}$ max. 100µA.
<b>Note</b>	This is not a real sensor supply. Only suitable for sensors with a very low power consumption like coils (sine wave).
<b>Terminal 4</b>	8.2V DC, $I_{out}$ max. 10mA, requires 10-30V DC supply.

## Data protection

<b>Type</b>	Non-volatile backup of all settings. Backup of running totals every minute. Data retention at least 10 years.
<b>Password</b>	Configuration settings can be password protected.

## Directives & Standards

<b>EMC</b>	Directive 2014/30/EU, FCC 47 CFR part 15.
<b>Low voltage</b>	Directive 2014/35/EU
<b>RoHS</b>	Directive 2011/65/EU
<b>IP &amp; NEMA</b>	EN 60529 & NEMA 250

## Enclosure

<b>Material</b>	GRP, IP65 (Type4), UV-resistant and flame retardant.
<b>Window</b>	Polycarbonate window.
<b>Sealing</b>	EPDM gasket.
<b>Control keys</b>	Two industrial micro-switch keys.
<b>Dimensions</b>	92 x 92 x 60mm (3.62" x 3.62" x 2.36") - W x H x D.
<b>Weight</b>	200 gram / 0.44 lbs.

## Terminal connections

<b>Type</b>	Removable plug-in terminal strip. Wire max. 1.5mm <sup>2</sup>
-------------	--

## Signal inputs - Flowmeter

<b>Pulse inputs</b>	Coil / sine wave (sensitivity: 80mVpp), NPN, PNP, reed-switch, Namur.
<b>Frequency</b>	Minimum OHZ - maximum 6kHz for total and flow rate. Maximum frequency depends on signal type and internal low-pass filter. E.g. reed-switch with low-pass filter: max. frequency 120Hz.
<b>K-Factor</b>	0.000010 - 9,999,999 with variable decimal position.

## Signal outputs - Digital output

<b>Function</b>	2 control outputs for accurate valve control.
<b>Output type</b>	Two passive transistor outputs (NPN) - not isolated. 300mA, max. 30V per output.

## Operator functions

<b>Displayed info</b>	<ul style="list-style-type: none"> <li>Actual value (batched quantity) and preset value simultaneously.</li> <li>Total.</li> <li>Accumulated total.</li> <li>Reset total by pressing the CLEAR-key twice.</li> </ul>
-----------------------	--

## Preset

<b>Digits</b>	7 digits.
<b>Units</b>	L, m <sup>3</sup> , US gal, igaal, Oil bbl, kg, lb or none.
<b>Decimals</b>	0 - 1 - 2 or 3.
<b>Note</b>	Total can be reset to zero.

## Total

<b>Digits</b>	7 digits.
<b>Units / decimals</b>	According to selection for preset.
<b>Note</b>	Total can be reset to zero.

## Accumulated total

<b>Digits</b>	7 digits.
<b>Units / decimals</b>	According to selection for preset.
<b>Note</b>	Can not be reset to zero.