

Absolute encoders – multiturn


**Compact
electronic multiturn, magnetic**

Sendix M3661 / M3681 (shaft / hollow shaft)

Analog



The Sendix M36 with Energy Harvesting Technology is an electronic multiturn encoder in miniature format, without gear and without battery. With a size of just 36 x 53 mm it offers a blind hollow shaft of up to 10 mm.

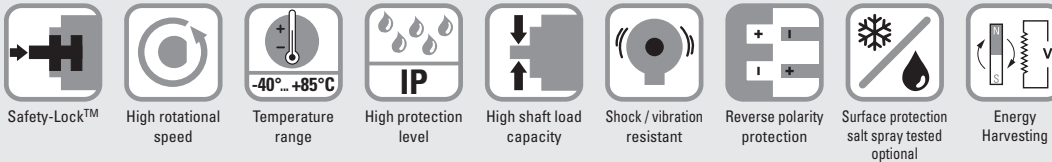

Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Reduced number of components ensures magnetic insensitivity.
- IP67 protection and wide temperature range -40°C ... +85°C.
- Without gear and without battery, thanks to the Energy Harvesting technology.

Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Measuring range scalable.
- Limit switch function.

Order code

Shaft version ¹⁾

8.M3661 . **XXXX** . **XX** **1 2**

Type a b c d e f

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = clamping flange, IP67, ø 36 mm [1.42"]
- 3 = clamping flange, IP65, ø 36 mm [1.42"]
- 2 = synchro flange, IP67, ø 36 mm [1.42"]
- 4 = synchro flange, IP65, ø 36 mm [1.42"]

b Shaft (ø x L), with flat

- 1 = ø 6 x 12.5 mm [0.24 x 0.49"]
- 3 = ø 8 x 15 mm [0.32 x 0.59"]
- 5 = ø 10 x 20 mm [0.39 x 0.79"]
- 2 = ø 1/4" x 12.5 mm [0.49"]

c Output circuit ²⁾

- 3 = current output
- 4 = voltage output

d Type of connection

- 1 = axial cable, 1 m [3.28'] PVC
- A = axial cable, special length PVC *)
- 2 = radial cable, 1 m [3.28'] PVC
- B = radial cable, special length PVC *)
- 3 = axial M12 connector
- 4 = radial M12 connector

*) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M3661.433A.3112.0030 (for cable length 3 m)

e Interface / resolution / power supply

- 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC
- 4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC
- 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

f Resolution ST + MT / count direction

- 1 = 12 bit + 4 bit / cw
- 2 = 12 bit + 4 bit / ccw
- 3 = scalable with limit switch function
- 4 = scalable without limit switch function

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

1) Series availability as from June 2015.

2) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – multiturn

Compact electronic multiturn, magnetic	Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
---	--	---------------

Order code	8.M3681	.XXXX.XX12	If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.	10 By 10
Hollow shaft ¹⁾	Type	a b c d e f		

<p>a Flange <u>2 = with stator coupling, IP65, ø 46 mm [1.81"]</u> 3 = with spring element, long, IP65 5 = with stator coupling, IP67, ø 46 mm [1.81"] 6 = with spring element, long, IP67</p> <p>b Blind hollow shaft 1 = ø 6 mm [0.24"] 3 = ø 8 mm [0.32"] <u>4 = ø 10 mm [0.39"]</u> 2 = ø 1/4"</p>	<p>c Output circuit ²⁾ <u>3 = current output</u> <u>4 = voltage output</u></p> <p>d Type of connection 1 = axial cable, 1 m [3.28'] PVC A = axial cable, special length PVC *) 2 = radial cable, 1 m [3.28'] PVC B = radial cable, special length PVC *) 3 = axial M12 connector <u>4 = radial M12 connector</u></p> <p>*) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm Ex.: 8.M3681.243A.3112.0030 (for cable length 3 m)</p>	<p>e Interface / resolution / power supply <u>3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC</u> <u>4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC</u> 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC</p> <p>f Resolution ST + MT / count direction <u>1 = 12 bit + 4 bit / cw</u> 2 = 12 bit + 4 bit / ccw 3 = scalable with limit switch function 4 = scalable without limit switch function</p> <p><i>Optional on request</i> - Ex 2/22 (only for connection types 3 and 4) - surface protection salt spray tested</p>
--	---	--

Mounting accessory for shaft encoders Order no.

Coupling	Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]	8.0000.1102.0808
-----------------	---	-------------------------

Mounting accessory for hollow shaft encoders with spring element Order no.

Cylindrical pin, long	With fixing thread	8.0010.4700.0000
for torque stops		

Connection technology Order no.

Connector, self-assembly (straight)	M12 female connector with coupling nut	8.0000.5116.0000
Cordset, pre-assembled	M12 female connector with coupling nut, 2 m [6.56'] PVC cable	05.00.6081.2211.002M

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology

Technical data

Mechanical characteristics	
Maximum speed	
shaft or blind hollow shaft version without shaft seal (IP65)	6000 min ⁻¹ 3000 min ⁻¹ (continuous)
shaft or blind hollow shaft version with shaft seal (IP67)	4000 min ⁻¹ 2000 min ⁻¹ (continuous)
Starting torque at 20°C [68°F]	
without shaft seal	< 0.007 Nm
with shaft seal (IP67)	< 0.01 Nm
Shaft load capacity	
radial	40 N
axial	20 N

Weight	approx. 0.2 kg [7.06 oz]	
Protection	housing side	IP67
acc. to EN 60529	shaft side	IP65 (solid shaft version opt. IP67)
Working temperature range	-40°C ... +85°C [-40°F ... +185°F]	
Materials	shaft / hollow shaft	stainless steel
	flange	aluminium
	housing	aluminium
	cable	PVC
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	300 m/s ² , 10 ... 2000 Hz	

1) Series availability as from June 2015.
 2) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".



Absolute encoders – multiturn

Compact electronic multiturn, magnetic		Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
Electrical characteristics current interface 4 ... 20 mA			
Power supply	10 ... 30 V DC		
Current consumption (no load)	max. 30 mA		
Reverse polarity protection of the power supply	yes		
Short-circuit proof outputs	yes ¹⁾		
Measuring range	factory setting optionally scalable	2 ⁴ revolutions up to 2 ¹⁶ revolutions	
Resolution	12 bit		
Absolute accuracy ²⁾	±1°		
Repeat accuracy	±0.2°		
Output load	at 10 V DC at 24 V DC	max. 200 Ohm max. 900 Ohm	
Setting time	< 1 ms, R _{Last} = 400 Ohm, 25°C [77°F]		
LEDs (green/red)	<ul style="list-style-type: none"> - system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode 		
Options	<ul style="list-style-type: none"> - output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function 		
Teach inputs	level = +V for 1 s min.		
PowerON Time	< 1 s		
Update rate	1 ms		
e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)		
UL approval	pending		
CE compliant acc. to	EMC guideline 2004/108/EC RoHS guideline 2011/65/EU		
Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V			
Power supply	output 0 ... 5 V output 0 ... 10 V	10 ... 30 V DC 15 ... 30 V DC	
Current consumption (no load)	max. 30 mA		
Reverse polarity protection of the power supply	yes		
Short-circuit proof outputs	yes ¹⁾		
Measuring range	factory setting optionally scalable	2 ⁴ revolutions up to 2 ¹⁶ revolutions	
Resolution	0 ... 10 V 0 ... 5 V	12 bit 11 bit	
Absolute accuracy ²⁾	±1°		
Repeat accuracy	±0.2°		
Current output	max. 10 mA		
Setting time	< 1 ms, R _{Last} = 400 Ohm, 25°C [77°F]		
LEDs (green/red)	<ul style="list-style-type: none"> - system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode 		
Options	<ul style="list-style-type: none"> - output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function 		
Teach inputs	level = +V for 1 s min.		
PowerON Time	< 1 s		
Update rate	1 ms		
e1 compliant acc. to (pending)	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)		
UL approval	pending		
CE compliant acc. to	EMC guideline 2004/108/EC RoHS guideline 2011/65/EU		

1) When the power supply is correctly applied.
But not output to +V. Power supply and sensor output signal are not galvanically isolated.
2) Over the whole temperature range.

Absolute encoders – multitrurn

Compact electronic multitrurn, magnetic	Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
--	--	---------------

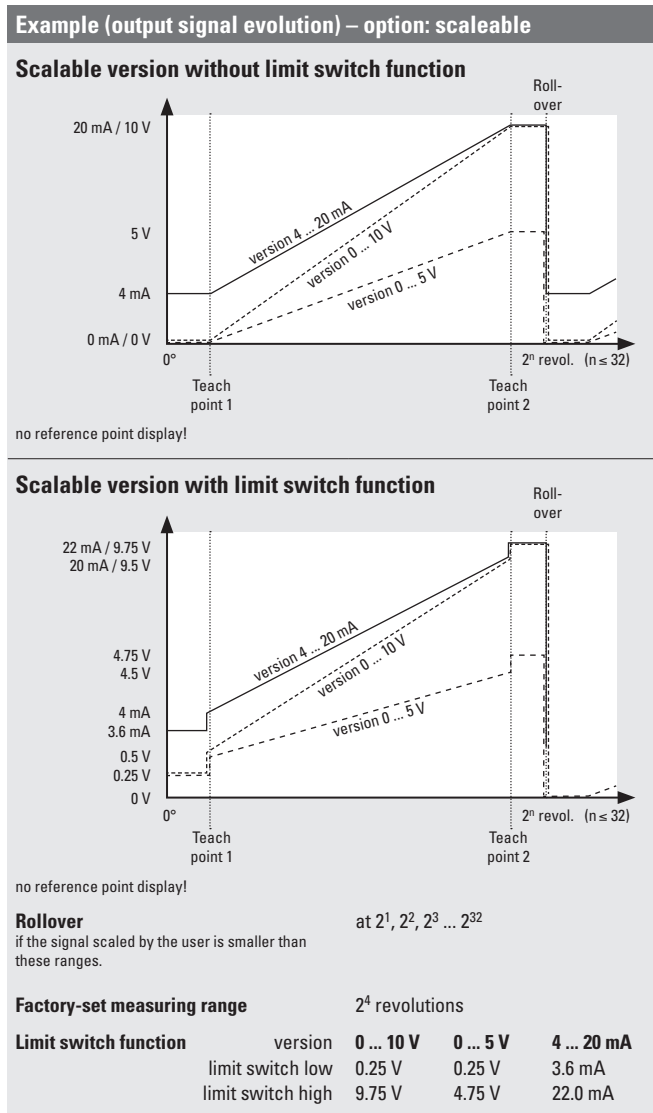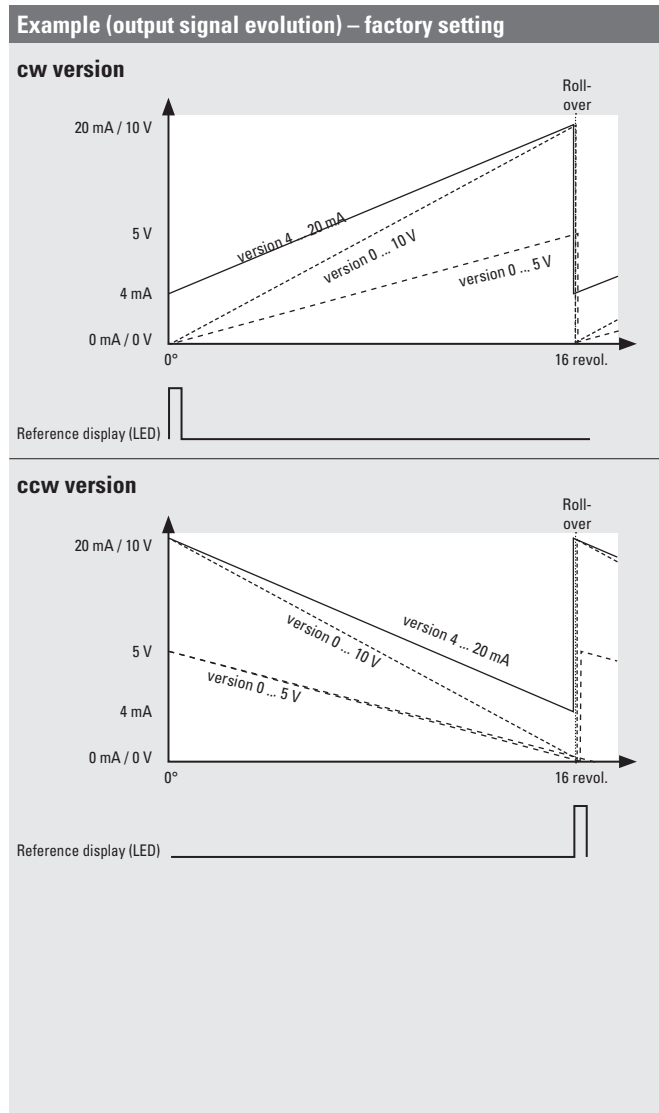


Absolute encoders multitrurn

Terminal assignment

Interface 3 (current)	Type of connection 1, 2, A, B	Cable (isolate unused wires individually before initial start-up)					
		Signal:	0 V	+V	+I	SET 1 ¹⁾	SET 2 ¹⁾
		Cable colour:	WH	BN	GN	GY	PK
Interface 3 (current)	Type of connection 3, 4	M12 connector, 5 pin					
		Signal:	0 V	+V	+I	SET 1 ¹⁾	SET 2 ¹⁾
		Pin:	3	2	1	5	4
Interface 4, 5 (current)	Type of connection 1, 2, A, B	Cable (isolate unused wires individually before initial start-up)					
		Signal:	0 V	+V	+U	SET 1 ¹⁾	SET 2 ¹⁾
		Cable colour:	WH	BN	GN	GY	PK
Interface 4, 5 (current)	Type of connection 3, 4	M12 connector, 5 pin					
		Signal:	0 V	+V	+U	SET 1 ¹⁾	SET 2 ¹⁾
		Pin:	3	2	1	5	4

Top view of mating side, male contact base



M12 connector, 5-pin

+V : encoder power supply +V DC +U : voltage SET 1 : set input for teachpoint 1
 0 V : encoder power supply ground GND (0 V) +I : current SET 2 : set input for teachpoint 2

1) For scalable version.

Absolute encoders – multiturn

Compact electronic multiturn, magnetic	Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
---	--	---------------


Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, $\varnothing 36$ [1.42]

Flange type 1 and 3

- 1 3 x M3, 6 [0.24] deep

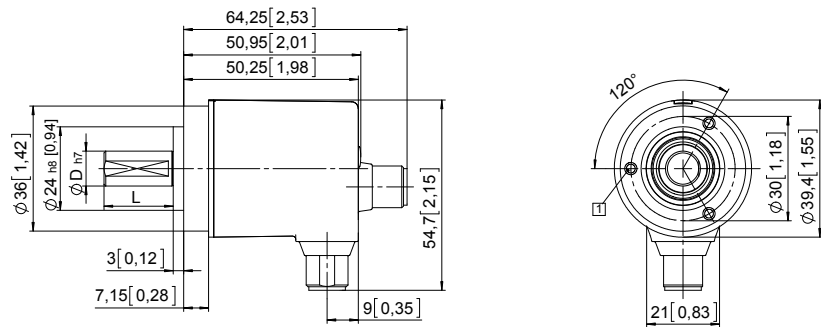


D	L	Fit
6 [0.24]	12.5 [0.49]	h7
8 [0.32]	15 [0.59]	h7
10 [0.39]	20 [0.79]	h7
1/4"	12.5 [0.49]	h7

Synchro flange, $\varnothing 36$ [1.42]

Flange type 2 and 4

- 1 4 x M3, 6 [0.24] deep

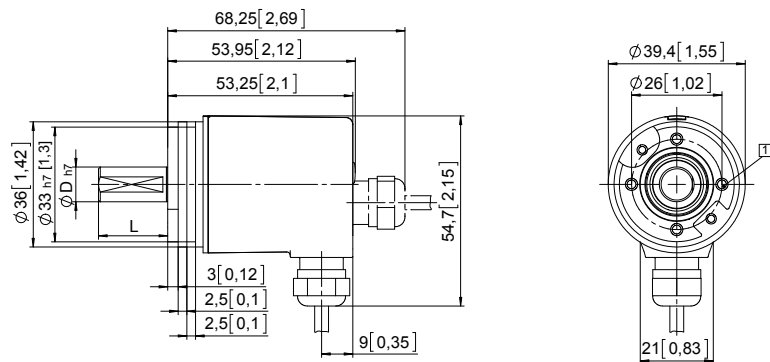

D	L	Fit
6 [0.24]	12.5 [0.49]	h7
8 [0.32]	15 [0.59]	h7
10 [0.39]	20 [0.79]	h7
1/4"	12.5 [0.49]	h7

Absolute encoders – multiturn

Compact electronic multiturn, magnetic	Sendix M3661 / M3681 (shaft / hollow shaft)	Analog
---	--	---------------



Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, long Flange type 3 and 6

- 1 Torque stop slot, recommendation: cylindrical pin DIN 7, \varnothing 4 [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

D	D1
6 [0.24]	24 [0.94]
8 [0.32]	25.5 [1.00]
10 [0.39]	25.5 [1.00]
1/4"	24 [0.94]

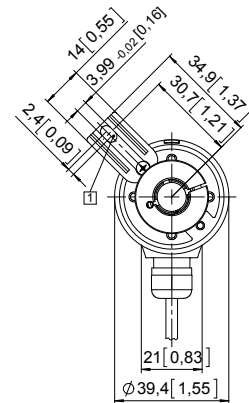
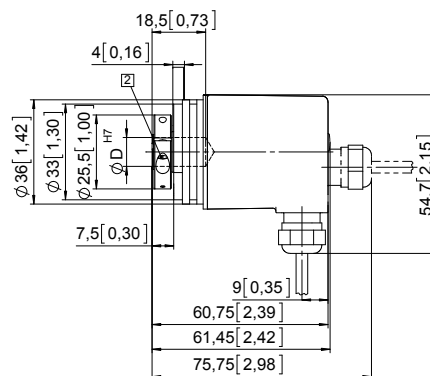


Insertion depth for blind hollow shaft 14.5 [0.57]

Flange with stator coupling, \varnothing 46 [1.81] Flange type 2 and 5

- 1 Recommended torque for the clamping ring 0.7 Nm

D	D1
6 [0.24]	24 [0.94]
8 [0.32]	25.5 [1.00]
10 [0.39]	25.5 [1.00]
1/4"	24 [0.94]



Insertion depth for blind hollow shaft 14.5 [0.57]

Absolute encoders
multiturn