

# Absolute encoders – multiturn

**Compact, robust  
electronic multiturn, magnetic**


**Sendix M3661R (shaft)**

**Analog**



The Sendix M36 with Energy Harvesting Technology is an electronic multiturn encoder in miniature format, without gear and without battery.

The "R" robust version is particularly suitable for use in harsh environments. Protected up to IP69k, resistance against shock and extreme temperature fluctuations, the Sendix M36 encoder is suitable even for demanding outdoor applications.

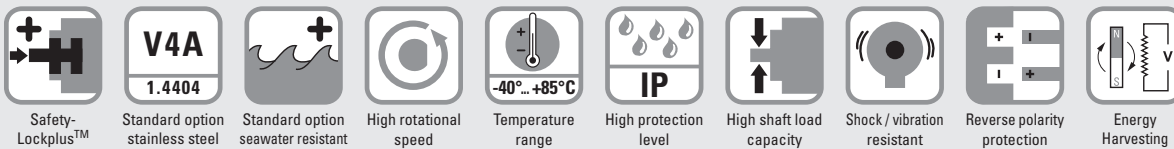

## Highest robustness

- Sturdy bearing construction in Safety-Lockplus™ design for particularly high resistance.
- Extra large bearings.
- Mechanically protected shaft seal.
- Protection level IP66, IP67 and IP69k in one device.
- Wide temperature range -40°C ... +85°C.
- Without gear and without battery, thanks to the Energy Harvesting technology.

## Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Measuring range scalable.
- Limit switch function.

## Order code Shaft version

**8.M3661R.XXX.XX12**  
Type

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.  
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



### a Version

- 1 = standard** <sup>1)</sup>  
clamping flange  $\varnothing$  42 mm [1.65"]  
7 = stainless steel V4A <sup>2)</sup>  
clamping flange  $\varnothing$  42 mm [1.65"]  
all metal parts accessible from outside  
are out of stainless steel V4A

- ### b Shaft ( $\varnothing \times L$ ), with flat
- 1 =  $\varnothing$  6 x 12.5 mm [0.24 x 0.49"]  
**3 =  $\varnothing$  8 x 15 mm [0.32 x 0.59"]**  
5 =  $\varnothing$  10 x 20 mm [0.39 x 0.79"]  
2 =  $\varnothing$  1/4" x 12.5 mm [0.49"]  
E =  $\varnothing$  10 x 20 mm [0.39 x 0.79"],  
stainless steel V4A

### c Output circuit <sup>3)</sup>

- 3 = current output**  
**4 = voltage output**
- ### d Type of connection
- 2 = radial cable, 1 m [3.28'] PVC  
B = radial cable, special length PVC \*)  
**4 = radial M12 connector**

\*) Available special lengths (connection types B):  
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']  
order code expansion .XXXX = length in dm  
ex.: 8.M3661R.133B.3112.0030 (for cable length 3 m)

### e Interface / resolution / power supply

- 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC**  
**4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC**  
5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

### f Measuring range

- 1 = 16 revolutions / cw**  
2 = 16 revolutions / ccw  
3 = scalable up to 65,536 revolutions,  
with limit switch function  
4 = scalable up to 65,536 revolutions,  
without limit switch function

### Optional on request

- Ex 2/22 (only for connection type 4)
- other shaft diameters out of V4A stainless steel

1) Not in conjunction with shaft type "E".

2) Only in conjunction with shaft type "E" + type of connection "4".

3) Output circuit "3" only in conjunction with interface "3",  
output circuit "4" only in conjunction with interface "4" or "5".

# Absolute encoders – multiturn

<b>Compact, robust electronic multiturn, magnetic</b>	<b>Sendix M3661R (shaft)</b>	<b>Analog</b>
<b>Mounting accessory for shaft encoders</b>		Order no.
<b>Coupling</b>	Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]	<b>8.0000.1102.0808<sup>1)</sup></b>
<b>Connection technology</b>		Order no.
<b>Connector, self-assembly (straight)</b>	M12 female connector with coupling nut	<b>8.0000.5116.0000<sup>1)</sup></b>
<b>Cordset, pre-assembled</b>	M12 female connector with coupling nut, 2 m [6.56'] PVC cable	<b>05.00.6081.2211.002M<sup>1)</sup></b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

## Technical data

Electrical characteristics current interface 4 ... 20 mA	
<b>Power supply</b>	10 ... 30 V DC
<b>Current consumption (no load)</b>	max. 30 mA
<b>Reverse polarity protection of the power supply</b>	yes
<b>Short-circuit proof outputs</b>	yes <sup>2)</sup>
<b>Measuring range</b>	factory setting 2 <sup>4</sup> revolutions optionally scalable up to 2 <sup>16</sup> revolutions
<b>DA converter resolution</b>	12 bit
<b>Singleturn accuracy, at 25°C [77°F]</b>	±1°
<b>Temperature coefficient</b>	< 100 ppm/K
<b>Repeat accuracy, at 25°C [77°F]</b>	±0.2°
<b>Output load</b>	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm
<b>Setting time</b>	< 1 ms, R <sub>Burden</sub> = 900 Ohm, 25°C [77°F]
<b>LEDs (green/red)</b>	- system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode
<b>Options</b>	- output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function
<b>Teach inputs</b>	level = +V for 1 s minimum
<b>PowerON Time</b>	< 1 s
<b>Update rate</b>	1 ms
<b>e1 compliant acc. to (pending)</b>	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)
<b>UL approval</b>	File 224618
<b>CE compliant acc. to</b>	EMC guideline 2004/108/EC RoHS guideline 2011/65/EU

Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V	
<b>Power supply</b>	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
<b>Current consumption (no load)</b>	max. 30 mA
<b>Reverse polarity protection of the power supply</b>	yes
<b>Short-circuit proof outputs</b>	yes <sup>2)</sup>
<b>Measuring range</b>	factory setting 2 <sup>4</sup> revolutions optionally scalable up to 2 <sup>16</sup> revolutions
<b>DA converter resolution</b>	0 ... 10 V 12 bit 0 ... 5 V 11 bit
<b>Singleturn accuracy, at 25°C [77°F]</b>	±1°
<b>Temperature coefficient</b>	< 100 ppm/K
<b>Repeat accuracy, at 25°C [77°F]</b>	±0.2°
<b>Current output</b>	max. 10 mA
<b>Setting time</b>	< 1 ms, R <sub>Load</sub> = 1000 Ohm, 25°C [77°F]
<b>LEDs (green/red)</b>	- system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1° - status in teach mode
<b>Options</b>	- output signal scalable via the teach inputs - output signal scalable via the teach inputs + limit switch function
<b>Teach inputs</b>	level = +V for 1 s minimum
<b>PowerON Time</b>	< 1 s
<b>Update rate</b>	1 ms
<b>e1 compliant acc. to (pending)</b>	EU guideline 2009/19/EC (acc. to EN 55025, ISO 11452 and ISO 7637)
<b>UL approval</b>	File 224618
<b>CE compliant acc. to</b>	EMC guideline 2004/108/EC RoHS guideline 2011/65/EU

Absolute encoders  
multiturn

1) Not for version "7" (V4A stainless steel)

2) When the power supply is correctly applied.

But not output to +V. Power supply and sensor output signal are not galvanically isolated.

# Absolute encoders – multiturn

**Compact, robust  
electronic multiturn, magnetic**

**Sendix M3661R (shaft)**

**Analog**

### Mechanical characteristics

<b>Maximum speed</b>	4000 min <sup>-1</sup> 2000 min <sup>-1</sup> (continuous)
<b>Starting torque at 20°C [68°F]</b>	< 0.01 Nm
<b>Shaft load capacity</b>	radial 80 N axial 40 N
<b>Weight</b>	approx. 0.2 kg [7.06 oz]
<b>Protection acc. to EN 60529/DIN 40050-9</b>	IP66, IP67, IP69k
<b>Working temperature range</b>	-40°C ... +85°C [-40°F ... +185°F]

### Materials


	version "1" (standard)	version "7" (stainless steel)
shaft	V2A	V4A
flange	aluminium	V4A
housing	zinc die-cast	V4A
cable	PVC	–

**Shock resistance** acc. to EN 60068-2-27 5000 m/s<sup>2</sup>, 4 ms


**Vibration resistance** acc. to EN 60068-2-6 300 m/s<sup>2</sup>, 10 ... 2000 Hz

### Example (output signal evolution) – factory setting

#### cw version

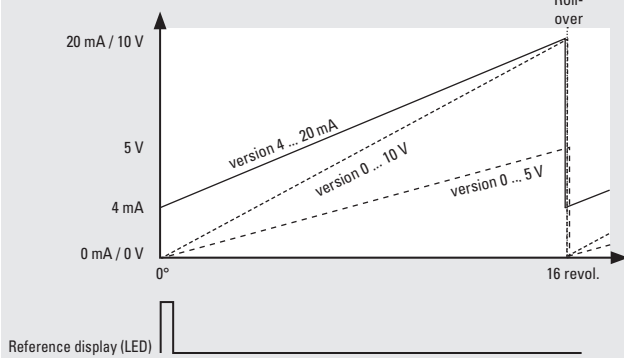


#### ccw version

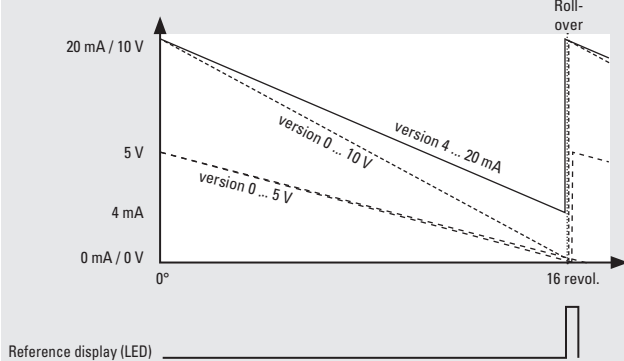


### Example (output signal evolution) – option: scaleable

#### Scaleable version without limit switch function

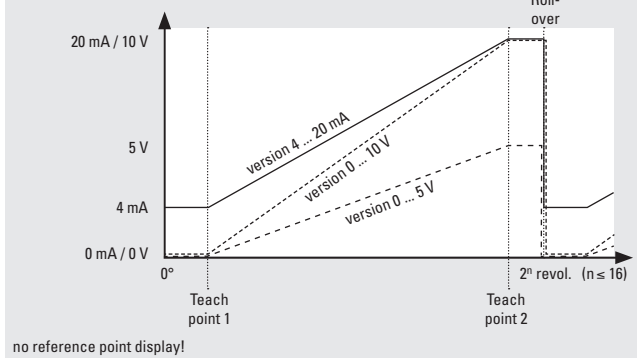

#### Scaleable version with limit switch function

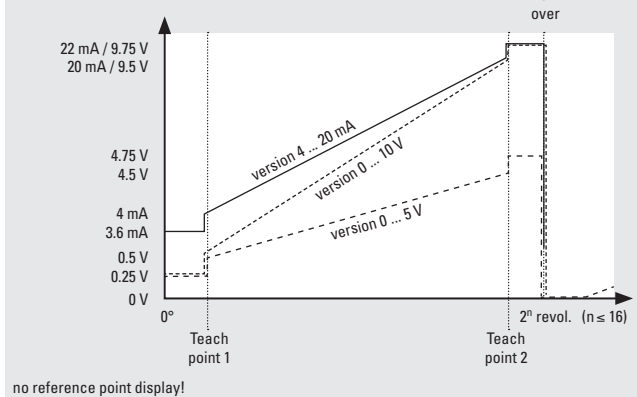

**Rollover** at 2<sup>1</sup>, 2<sup>2</sup>, 2<sup>3</sup> ... 2<sup>16</sup>  
if the signal scaled by the user is smaller than these ranges.

**Factory-set measuring range** 2<sup>4</sup> revolutions

Limit switch function	version	0 ... 10 V	0 ... 5 V	4 ... 20 mA
limit switch low		0.25 V	0.25 V	3.6 mA
limit switch high		9.75 V	4.75 V	22.0 mA


# Absolute encoders – multiturn

<b>Compact, robust electronic multiturn, magnetic</b>	<b>Sendix M3661R (shaft)</b>	<b>Analog</b>
---	------------------------------	---------------

## Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)					
3 (current)	2, B	Signal:	0 V	+V	+I	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Cable colour:	WH	BN	GN	GY	PK
Interface	Type of connection	M12 connector, 5 pin					
3 (current)	4	Signal:	0 V	+V	+I	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	2	1	5	4
Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)					
4, 5 (current)	2, B	Signal:	0 V	+V	+U	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Cable colour:	WH	BN	GN	GY	PK
Interface	Type of connection	M12 connector, 5 pin					
4, 5 (current)	4	Signal:	0 V	+V	+U	SET 1 <sup>1)</sup>	SET 2 <sup>1)</sup>
		Pin:	3	2	1	5	4

Top view of mating side, male contact base



M12 connector, 5-pin

+V : encoder power supply +V DC      +U : voltage      SET 1 : set input for teachpoint 1  
 0 V : encoder power supply ground GND (0 V)      +I : current      SET 2 : set input for teachpoint 2



## Dimensions

Dimensions in mm [inch]

### Aluminium, clamping flange, ø 42 [1.65] version 1

1) 3 x M3, 6 [0.24] deep



D	L	Fit
6 [0.24]	12.5 [0.49]	h7
8 [0.32]	15 [0.59]	h7
10 [0.39]	20 [0.79]	h7
1/4"	12.5 [0.49]	h7

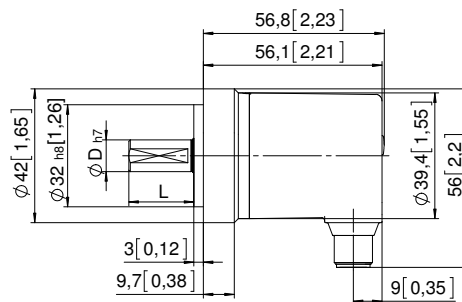

### Stainless steel V4A, clamping flange, ø 42 [1.65] version 7

1) 4 x M4, 8 [0.31] deep

D	L	Fit
6 [0.24]	12.5 [0.49]	h7
8 [0.32]	15 [0.59]	h7
10 [0.39]	20 [0.79]	h7
1/4"	12.5 [0.49]	h7

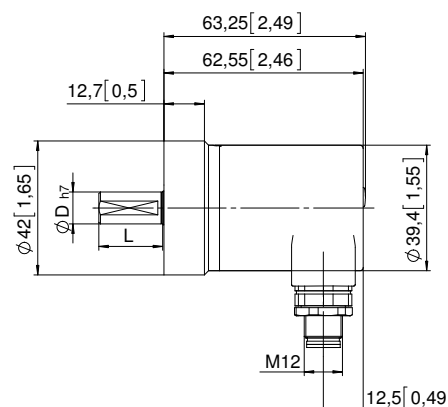

1) For scalable version.