

# Absolute Encoders - Singleturn

Standard  
SIL3/PLe, optical


Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)

SSI/BiSS + SinCos



The absolute singleturn encoders 5853FS3 and 5873FS3 of the Sendix SIL family are suited for use in safety-related applications up to SIL3 according to EN 61800-5-2 or PLe to EN ISO 13849-1.

The extra strong Safety-Lock™ Design interlocked bearings, the high integration density of the components based on OptoASIC technology and the rugged die-cast housing make these devices ideal also for demanding applications outdoors up to IP65.

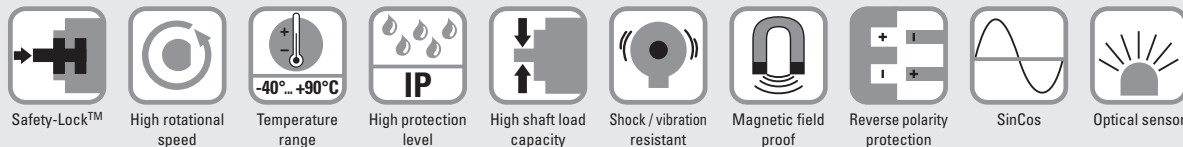

## Functional Safety

- Encoder with individual certificate from IFA / TÜV.
- Suitable for applications up to SIL3 acc. to EN 61800-5-2.
- Suitable for applications up to PLe acc. to EN ISO 13849-1.
- SSI or BiSS interface with incremental SinCos tracks with 2048 ppr.
- Certified mechanical mounting + electronic.

## Flexible

- Shaft and hollow shaft versions.
- Cable and connector variants.
- Various mounting options available.

Order code  
Shaft version

8.5853FS3 . 1 X X X . X X 2 X  
Type a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



### a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

### b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat

A = 10 x 20 mm [0.39 x 0.79"], with feather key

### c Interface / Power supply

3 = SSI or BiSS + 2048 ppr SinCos / 5 V DC

4 = SSI or BiSS + 2048 ppr SinCos / 10 ... 30 V DC

### d Type of connection

1 = axial cable, 1 m [3.28'] PVC

2 = radial cable, 1 m [3.28'] PVC

3 = M23 connector, 12 pin, axial

4 = M23 connector, 12 pin, radial

### e Code

B = SSI, Binary

C = BiSS, Binary

G = SSI, Gray

### f Resolution <sup>1)</sup>

A = 10 bit ST

1 = 11 bit ST

2 = 12 bit ST

3 = 13 bit ST

4 = 14 bit ST

7 = 17 bit ST

### g Input/output <sup>1)</sup>

2 = SET, DIR input

### h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

*optional on request*

- special cable length

- Ex 2/22

Order code  
Hollow shaft

8.5873FS3 . X X X X . X X 2 X  
Type a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



### a Flange

9 = with torque stop, flexible, IP65

A = with torque stop set, rigid, IP65

B = with stator coupling, IP65, ø 63 mm [2.48"]

### b Hollow shaft

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

K = ø 10 mm [0.39"], tapered shaft

### d Type of connection

2 = radial cable, 1 m [3.28'] PVC

E = tangential cable, 1 m [3.28'] PVC

4 = M23 connector, 12 pin, radial

### e Code

B = SSI, Binary

C = BiSS, Binary

G = SSI, Gray

### f Resolution <sup>1)</sup>

A = 10 bit ST

1 = 11 bit ST

2 = 12 bit ST

3 = 13 bit ST

4 = 14 bit ST

7 = 17 bit ST

### g Input/output <sup>1)</sup>

2 = SET, DIR input

### h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

*optional on request*

- special cable length

- Ex 2/22

1) Resolution, preset value and count direction are factory-programmable.

# Absolute Encoders - Singleturn

Standard SIL3/PLe, optical	Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)	SSI/BiSS + SinCos
<b>Accessory</b>		Order No.
<b>EMC shield terminal</b>	For top-hat rail mounting	<b>8.0000.4G06.0000</b>
<b>Screw retention</b>	Loctite 243, 5 ml	<b>8.0000.4G05.0000</b>
<b>Bellows coupling, safety-oriented</b>	You will find an overview of our couplings for Sendix SIL shaft encoders in the accessories section or under <a href="http://www.kuebler.com/accessories">www.kuebler.com/accessories</a> .	
<b>Safety modules Safety-M compact / modular</b>	You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under <a href="http://www.kuebler.com/safety">www.kuebler.com/safety</a> .	
<b>LED SSI display 570 / 575</b>	Electronic position display up to 32 bit. You will find an overview in the accessories section or under <a href="http://www.kuebler.com/position_display">www.kuebler.com/position_display</a> .	
<b>Connection technology</b>		Order No.
<b>Cordset, pre-assembled</b>	M23 female connector with coupling nut, 2 m [6.56'] PVC cable <sup>1)</sup>	<b>8.0000.6901.0002.0031</b>
	M23 female connector with coupling nut, 10 m [32.81'] PVC cable <sup>1)</sup>	<b>8.0000.6901.0010.0031</b>
<b>Connector, self-assembly (straight)</b>	M23 female connector with coupling nut	<b>8.0000.5012.0000</b>
	M23 female connector with coupling nut, Ex zone 2/22	<b>8.0000.5012.0000.Ex</b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

## Technical data

Notes regarding "Functional Safety"	
These encoders are suitable for use in safety-related systems up to SIL3 acc. to EN 61800-5-2 and PLe to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.	
Additional functions can be found in the operating manual.	

Safety characteristics	
<b>Classification</b>	PLe / SIL3
<b>System structure</b>	2 channel (Cat. 4 / HFT = 1)
<b>PFH<sub>d</sub> value <sup>2)</sup></b>	1.09 x 10 <sup>-8</sup> h <sup>-1</sup>
<b>Proof-test interval</b>	20 years
<b>Relevant standards</b>	EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007

Electrical characteristics	
<b>Power supply</b>	5 V DC ±5 % or 10 ... 30 V DC
<b>Current consumption (no load)</b>	5 V DC max. 70 mA 10 ... 30 V DC max. 45 mA
<b>Reverse polarity protection of the power supply (+V)</b>	yes
<b>Short circuit proof outputs</b>	yes <sup>4)</sup>
<b>UL approval</b>	File 224618
<b>CE compliant acc. to</b>	EMC guideline 2004/108/EC Machinery directive 2006/42/EC
<b>RoHS compliant acc. to</b>	guideline 2011/65/EU

EMC	
<b>Relevant standards</b>	EN 55011 Class B :2009 / A1:2010 EN 61000-6-3 :2007 / A1:2011 EN 61000-6-2 :2005

Mechanical characteristics		
<b>Max. speed, shaft version</b>	up to 70°C [158°F] [158°F]	12 000 min <sup>-1</sup> , 10 000 min <sup>-1</sup> (continuous)
	up to T <sub>max</sub>	8 000 min <sup>-1</sup> , 5 000 min <sup>-1</sup> (continuous)
<b>Max. speed, hollow shaft version</b>	up to 70°C [158°F] [158°F]	9 000 min <sup>-1</sup> , 6 000 min <sup>-1</sup> (continuous)
	up to T <sub>max</sub>	6 000 min <sup>-1</sup> , 3 000 min <sup>-1</sup> (continuous)
<b>Starting torque - at 20°C [68°F]</b>	shaft version	< 0.01 Nm
	hollow shaft version	< 0.03 Nm
<b>Moment of inertia</b>	shaft version	4.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
	hollow shaft version	7.0 x 10 <sup>-6</sup> kgm <sup>2</sup>
<b>Insertion depth for shaft</b>	hollow shaft version	min. 34 mm [1.34"]
<b>Load capacity of shaft</b>	radial	80 N
	axial	40 N
<b>Weight</b>		approx. 0.45 kg [15.87 oz]
<b>Protection acc. to EN 60529</b>		IP65
<b>EX approval for hazardous areas</b>		optional zone 2 and 22
<b>Working temperature range</b>		-40°C ... +90°C <sup>3)</sup> [-40°F ... +194°F] <sup>3)</sup>
<b>Material</b>	shaft / hollow shaft	stainless steel
	flange	aluminium
	housing	zinc die-cast housing
	cable	PVC
<b>Shock resistance acc. EN 60068-2-27</b>		500 m/s <sup>2</sup> , 11 ms
<b>Vibration resistance acc. EN 60068-2-6</b>		200 m/s <sup>2</sup> , 10 ... 150 Hz

- 1) Other lengths available.
- 2) The specified value is based on a diagnostic coverage of 99 %, that must be achieved with an encoder evaluation unit.  
The encoder evaluation unit must meet at least the requirements for SIL3.
- 3) Cable version: -30°C ... +90°C [-22°F ... +194°F].
- 4) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied.

# Absolute Encoders - Singleturn

<b>Standard SIL3/PLe, optical</b>	<b>Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)</b>	<b>SSI/BiSS + SinCos</b>
---------------------------------------	--	--------------------------

SSI interface	
<b>Output driver</b>	RS485 transceiver type
<b>Permissible load / channel</b>	max. 20 mA
<b>Signal level</b>	HIGH typ 3.8 V LOW at I <sub>load</sub> = 20 mA typ 1.3 V
<b>Singleturn resolution</b>	10 ... 14 bit and 17 bit <sup>1)</sup>
<b>Code</b>	Binary or gray
<b>SSI clock rate</b>	50 kHz ... 2 MHz
<b>Monoflop time</b>	≤ 15 μs
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.	
<b>Data refresh rate</b>	resolution ≤ 14 bit ≤ 1 μs resolution ≥ 15 bit 4 μs
<b>Status and parity bit</b>	on request

BiSS interface	
<b>Resolution singleturn</b>	10 ... 14 bit and 17 bit <sup>1)</sup>
<b>Code</b>	Binary
<b>Clock rate</b>	up to 10 MHz
<b>Max. update rate</b>	< 10 μs, depends on the clock rate and the data length
<b>Data refresh rate</b>	≤ 1 μs
<b>Note:</b>	<ul style="list-style-type: none"> <li>- Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings</li> <li>- CRC data verification</li> </ul>

SinCos interface	
<b>Max. frequency -3dB</b>	400 kHz
<b>Signal level</b>	1 V <sub>pp</sub> (±10 %)
<b>Short circuit proof</b>	yes
<b>Pulse rate</b>	2048 ppr

SET input or SET button	
<b>Input</b>	active HIGH
<b>Input type</b>	comparator
<b>Signal level</b>	HIGH min: 60 % of +V, max: +V LOW max: 25 % of +V (Power supply)
<b>Input current</b>	< 0.5 mA
<b>Min. pulse duration (SET)</b>	10 ms
<b>Timeout after SET signal</b>	14 ms
<b>Reaction time (DIR input)</b>	1 ms
The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal delay time of approx. 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approx. 15 ms before the new position data can be read. During this time the LED is ON.	

DIR input	
A HIGH signal switches the direction of rotation from the default CW to CCW. This function can also be factory-programmed to be inverted. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The LED will come ON and the status output will switch to LOW.	

Power-on delay	
After Power-ON the encoder requires a time of approx. 150 ms before valid data can be read.	

LED	
The optional LED (red) serves to display various alarm or error messages. In normal operation the LED is OFF.	
If the LED is ON (status output LOW) this indicates:	
<ul style="list-style-type: none"> <li>- Sensor error, singleturn or multiturn (soiling, glass breakage etc.)</li> <li>- LED error, failure or ageing</li> <li>- Over- or under-temperature</li> </ul>	
In the SSI mode, the fault indication can only be reset by switching off the power supply to the device.	

## Terminal assignment


Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)													
		Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	$\bar{A}$	B	$\bar{B}$	$\perp$
3, 4	1, 2, E	Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield

Interface	Type of connection	M23 connector, 12-pin													
		Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	$\bar{A}$	B	$\bar{B}$	$\perp$
3, 4	3, 4	Pin:	1	2	3	4	5	6	7	8	9	10	11	12	PH

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- C+, C-: Clock signal
- D+, D-: Data signal
- SET: Set input. The current position becomes defined as position zero.
- DIR: Direction input: If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.
- A,  $\bar{A}$ : cosine signal
- B,  $\bar{B}$ : sine signal
- PH  $\perp$ : Plug connector housing (shield)

Top view of mating side, male contact base



M23 connector, 12-pin

1) Other options on request.

# Absolute Encoders - Singleturn


<b>Standard SIL3/PLe, optical</b>	<b>Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)</b>	<b>SSI/BiSS + SinCos</b>
---------------------------------------	--	--------------------------

## Dimensions shaft version

Dimensions in mm [inch]


### Clamping flange, $\varnothing$ 58 [2.28] Flange type 1 with shaft type 2 (Drawing with cable)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- D = 10 <sup>h7</sup> [0.39]

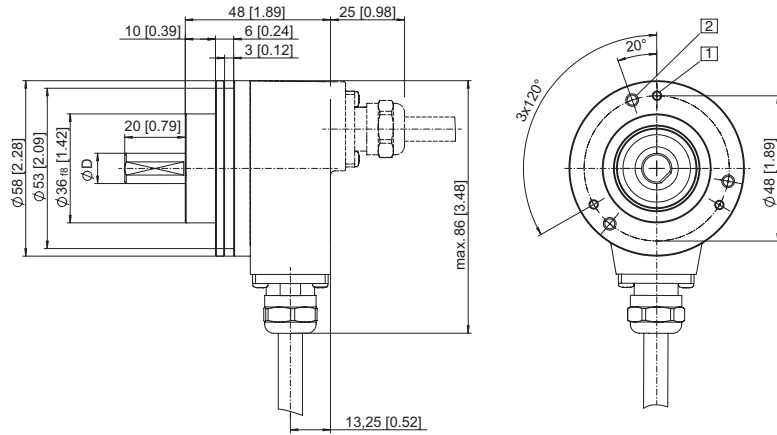

### Clamping flange, $\varnothing$ 58 [2.28] Flange type 1 with shaft type A (Drawing with M23 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6
- D = 10 <sup>h7</sup> [0.39]

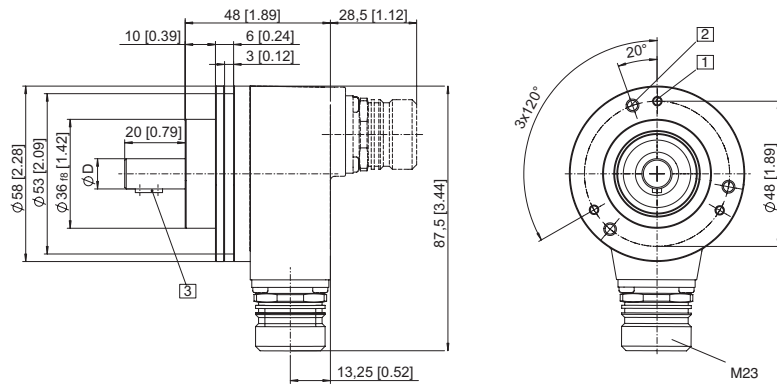

Absolute Encoders  
Singleturn

# Absolute Encoders - Singleturn

**Standard  
SIL3/PLe, optical**

**Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)**

**SSI/BiSS + SinCos**

## Dimensions hollow shaft version

Dimensions in mm [inch]



### Flange with torque stop set, rigid

#### Flange type A


(Drawing with cable)

- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

D =  $\varnothing$  10<sup>H7</sup> [0.39]  
 $\varnothing$  12<sup>H7</sup> [0.47]  
 $\varnothing$  14<sup>H7</sup> [0.55]

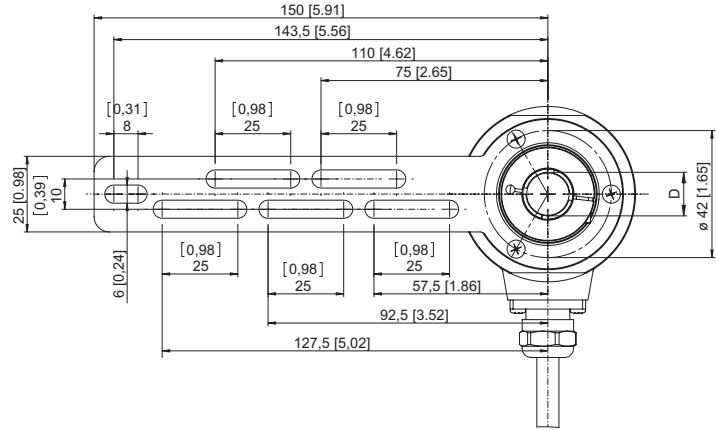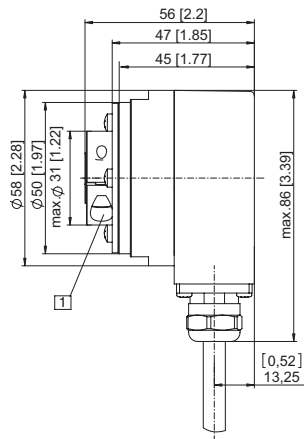

Torque pin with rectangular sleeve with M4 thread

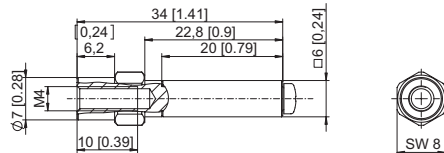



### Flange with torque stop, flexible

#### Flange type 9

(Drawing with M23 connector)

- 1 recommended torque for the clamping ring 2.5 Nm

D =  $\varnothing$  10<sup>H7</sup> [0.39]  
 $\varnothing$  12<sup>H7</sup> [0.47]  
 $\varnothing$  14<sup>H7</sup> [0.55]

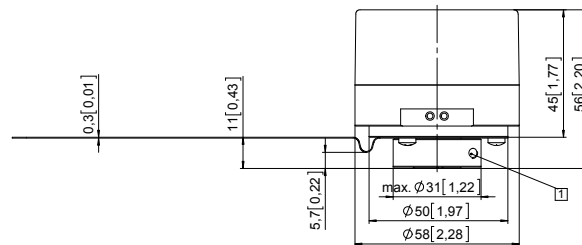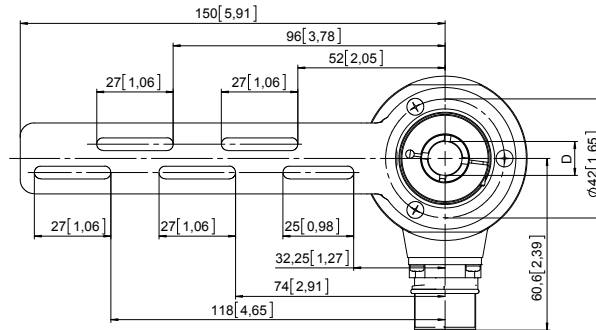

# Absolute Encoders - Singleturn

<b>Standard SIL3/PLe, optical</b>	<b>Sendix SIL 5853FS3 / 5873FS3 (Shaft / Hollow shaft)</b>	<b>SSI/BiSS + SinCos</b>
---------------------------------------	--	--------------------------

## Dimensions hollow shaft version

Dimensions in mm [inch]

### Flange with stator coupling, $\varnothing$ 63 [2.48] and hollow shaft

#### Flange type B

(Drawing with M23 connector)


- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

- 2 for (4x) M3 screw

$D = \varnothing 10^{H17}$  [0.39]

$\varnothing 12^{H17}$  [0.47]

$\varnothing 14^{H17}$  [0.55]

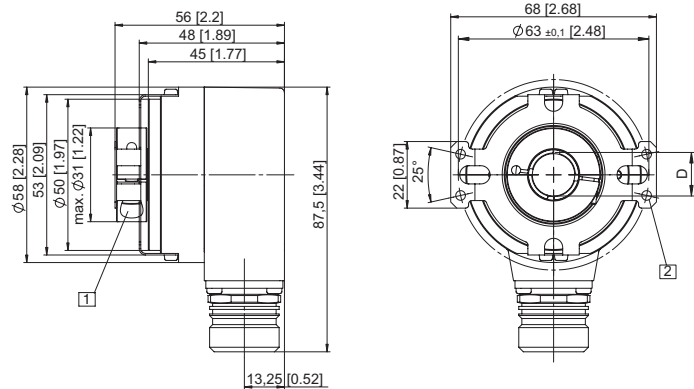

### Flange with stator coupling, $\varnothing$ 63 [2.48] and tapered shaft

#### Flange type B

(Drawing with tangential cable outlet)

- 1 for (4x) M3 screw

- 2 Status LED

- 3 SET button

- 4 SW 4

