



VariTouch

15" True Flat Aluminium Touch Monitor



VESA Mount & ARM
Supported



Projected capacitive
technology & multi-touch



True flat & IP66
waterproof



Robust aluminium base
and housing

Display	TFT LCD	38.1cm (15")
	Brightness	250nits
	Resolution	1024 x 768
	Touch Screen	True Flat Projected Capacitive Technology / True Flat 5-Wire Resistive (USB)
I/O Ports	DC Input	1 x DC Jack 5.5mm*2.5mm 2Pin (DC 12V only)
	Audio Input	1 x Audio Jack 3.5mm
	VGA Input	1 x D-SUB 15 Pin
	USB Port	1 x USB Host (USB Host For Touch)
	Serial Port	1 x RS-232 (Optional, for MSR/iButton)
	PS/2 Port	1 x PS/2 Host for MSR & iButton (Optional, for MSR/iButton)
	Audio	AC 97 2.0 compliant, 2W Speaker x 2
Compliance		IP 66 on front panel
Power Supply		External Adapter, DC Model:36Watts, Voltage:+12VDC 3.0 Amax
Material		Main Unit: Die-casting aluminum ; I/O Cover:Plastic
Color		Main Unit: Gray / Black / White *Customized color for plastic parts
Certifications		CE, FCC, Class-B, RoHS, WEEE
Dimension(W x H x D)		370 x 236 x 300 mm
Weight		4.4 Kg (Aluminium Base: 1 Kg)
VESA Mounting		100 x 100mm
Operating Temperature		0°C ~ 40°C, 10% ~ 90% RH, non-condensing
Storage Temperature		-20°C ~ 60°C, 10% ~ 90% RH, non-condensing

*All right has been reserved to change the specification without prior notice.

Order Information

• VTM-1525:

15" VariTouch, True Flat Aluminium Touch Monitor, w/ Base


• VTM-1525M:

15" VariTouch, True Flat Aluminium Touch Monitor, w/o Base


Optional accessories

- MSR, Front, 3 Tracks PS/2 Type
- MSR+Fingerprint, PS/2 Type
- MSR+iButton, PS/2 Type

Dimensions

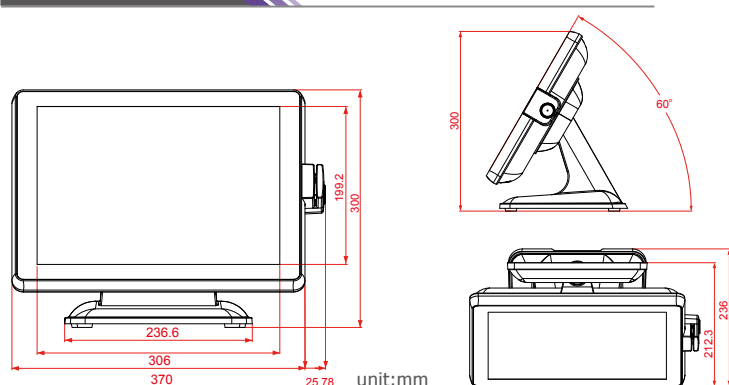

I/O Interface

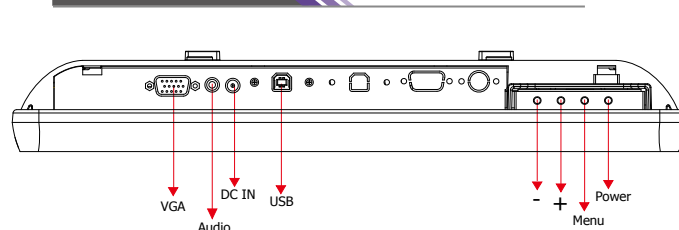

Poindus

Poindus Systems Corp.

Tel: +886-2-77214688

E-mail: sales@poindus.com

6F., No. 1, Lane. 28, Xingzhong Rd., Neihu Dist., Taipei City 114, Taiwan

Fax: +886-2-77212289

<http://www.poindus.com>