




VariVitro

Touch-thru-Glass Interactive Systems

15"/ 19" VariVitro

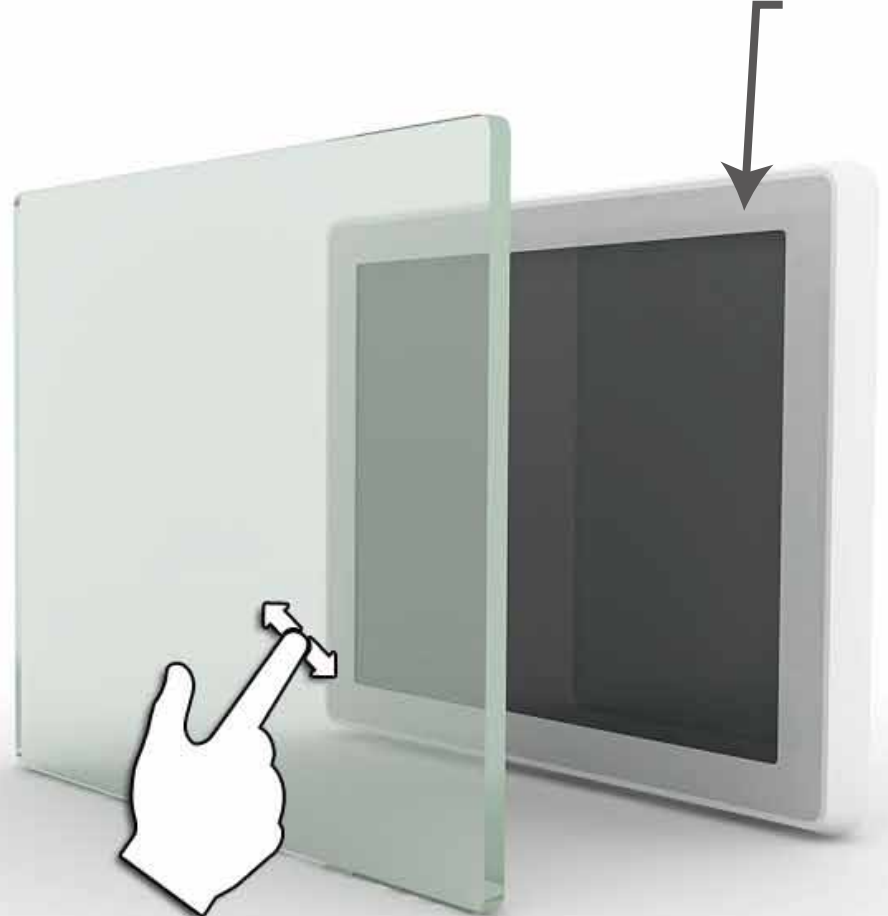

"Touch-through-Glass" technology
Makes retail windows into interactive displays

SPECIFICATION

Model Name		VariVetro 715	VariVetro 815	Varivetro 819
Main Spec	CPU	Intel® Pineview D510 1.66GHz Intel® Pineview D525 1.8GHz*	Intel® Core i5 2.5GHz Intel® Core i3 2.2GHz Intel® Mobile Celeron B810 1.6GHz	Intel® Core i5 2.5GHz Intel® Core i3 2.2GHz (Fanless) Intel® Mobile Celeron B810 1.6GHz (Fanless)
	Chipset	Intel® Pineview + ICH8M	Intel HM65	Intel HM65
	System Memory	1 x SO-DIMM DDRII 667, up to 2GB 1 x DDRIII SO-DIMM 800, up to 4GB (For D525 CPU*)	1 x SO-DIMM DDRIII 1333, up to 8GB	1 x SO-DIMM DDRIII 1333, up to 8GB
Display	TFT LCD	15" LED backlight	15" LED backlight	19" LED backlight
	Brightness	400 nits / 1000 nits (optional)	400 nits / 1000 nits (optional)	350 nits
	Resolution	1024 x 768	1024 x 768	1280 x 1024
	Touch Screen	15" True Flat Projected Capacitive Technology	15" True Flat Projected Capacitive Technology	19" True Flat Projected Capacitive Technology
	Glass Thickness	Max 10mm	Max 10mm	Max 8mm
Storage	HDD Type	1 x SATA 6.4cm (2.5")HDD	1 x SATA 6.4cm (2.5")HDD	1 x SATA 6.4cm (2.5")HDD
	SSD Type	1 x SATA 6.4cm (2.5") SSD (optional)	1 x SATA 6.4cm (2.5") SSD (optional)	1 x SATA 6.4cm (2.5") SSD (optional)
	Compact Flash Type	1 x Slot Type II (optional)	N/A	N/A
I/O Ports - External	DC Input	1 x Mini Din 4P (DC 12V only)	1 x Mini Din 4P (DC 12V only)	1 x Mini Din 4P (DC 12V only)
	Cash Drawer	1 x RJ-11 (Power Pin 12V)	1 x RJ-11 (Power Pin 12V)	1 x RJ-11 (Power Pin 12V)
	Network (LAN)	1 x Gigabit Ethernet by RJ-45	1 x Gigabit Ethernet by RJ-45	1 x Gigabit Ethernet by RJ-45
	USB Port	4 x USB 2.0	4 x USB 2.0	4 x USB 2.0
	Serial Port	4 x RS-232 w/ RI/5V/12V power (COM1/2: DB-9, COM3 : RJ-48, COM 4: DB-9 [Standard])	4 x RS-232 w/ RI/5V/12V power (COM1/2: DB-9, COM3/4 : RJ-48)	4 x RS-232 w/ RI/5V/12V power (COM1/2: DB-9, COM3/4 : RJ-48)
	Audio	1 x Line out / MIC in (Standard)	1 x Line out / MIC in	1 x Line out / MIC in
	PS/2 Port	1 x PS/2 Keyboard	1 x PS/2 Keyboard	1 x PS/2 Keyboard
	LPT Port	1 x DB-25 Printer Port (optional)	1 x DB-25 Printer Port(optional)	1 x DB-25 Printer Port
	VGA Port	1 x DB-15 VGA Port (optional)	1 x DB-15 VGA Port (optional)	1 x DB-15 VGA Port
I/O Ports - Internal	Audio	HD Audio compliant, 2W Speaker x 2	HD Audio compliant, 2W Speaker x 2	HD Audio compliant, 2W Speaker x 2
	Bus Expansion	1 x Mini-PCI-E Slot	1 x Mini-PCI-E Slot	1 x Mini-PCI-E Slot
Compliance	IP 66 on front panel		IP 66 on front panel	IP 66 on front panel
System Management	Desktop Management Interface (DMI)/ Preboot Execution Environment (PXE) /Wake on LAN (WoL) Advanced Configuration and Power Interface (ACPI)		Desktop Management Interface (DMI)/ Preboot Execution Environment (PXE) /Wake on LAN (WoL) Advanced Configuration and Power Interface (ACPI)	Desktop Management Interface (DMI)/ Preboot Execution Environment (PXE) /Wake on LAN (WoL) Advanced Configuration and Power Interface (ACPI)
OS Support	Windows® 7 / Windows® XP Embedded / Windows® XP Pro Embedded / Fedora(Linux)		Windows® 7 / Windows® XP Embedded / Windows® XP Pro Embedded / Fedora Core	Windows® 7 / Windows® XP Embedded / Windows® XP Pro Embedded / Fedora Core
Power Supply	80 Watts, Voltage:+12VDC 6.6A max.		120 Watts, Voltage:+12VDC 10A max.	120 Watts, Voltage:+12VDC 10A max.
Material	Main Unit: Die-casting aluminum ; I/O Cover:Plastic		Main Unit: Die-casting aluminum ; I/O Cover:Plastic	Main Unit: Die-casting aluminum ; I/O Cover:Plastic
Color	Main Unit: Gray/Black/ White *Customized color for plastic parts		Main Unit: Gray/Black/ White *Customized color for plastic parts	Main Unit: Gray/Black/ White *Customized color for plastic parts
Certifications	CE, FCC, Class-A, RoHS, WEEE		CE, FCC, Class-B, RoHS, WEEE	CE, FCC, Class-B, RoHS, WEEE
Dimension(W x H x D)	370 x 287 x 55mm		370 x 287 x 55mm	446 x 377 x 70 mm
Weight	4.7 Kg		5.0 Kg	7.3 Kg
VESA Mounting	100 x 100 mm		100 x 100 mm	100 x 100 mm
Operating Temperature	0°C ~ 40°C, 10% ~ 90% RH, non-condensing		0°C ~ 40°C, 10% ~ 90% RH, non-condensing	0°C ~ 40°C, 10% ~ 90% RH, non-condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing		-20°C ~ 60°C, 10% ~ 90% RH, non-condensing	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing

The right has been reserved to change the specification without prior notice.

* Requires minimum ordering quantity.