


Open Frame LCD

Open Frame LCD

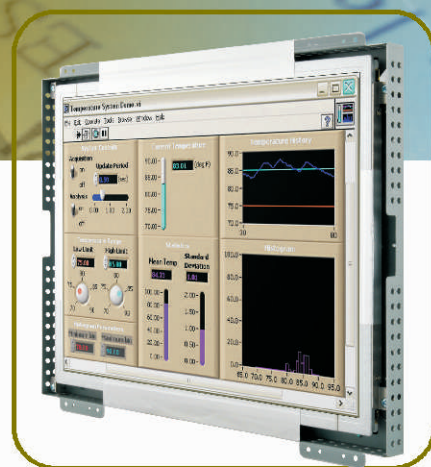

15"

Specifications




Model Name	R15L600-OFC3
Viewable Size Image	15"
Active Display Area(mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Color	16.2M(6bit+FRC)
Brightness(cd/m ²)	250(typ.)
Viewing Angle(CR>=10)	-70~70(H); -60~65(V)
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

Remarks:R15L600 series= VGA input only

R15L630 series= VGA+Video Input

Mechanical Drawing

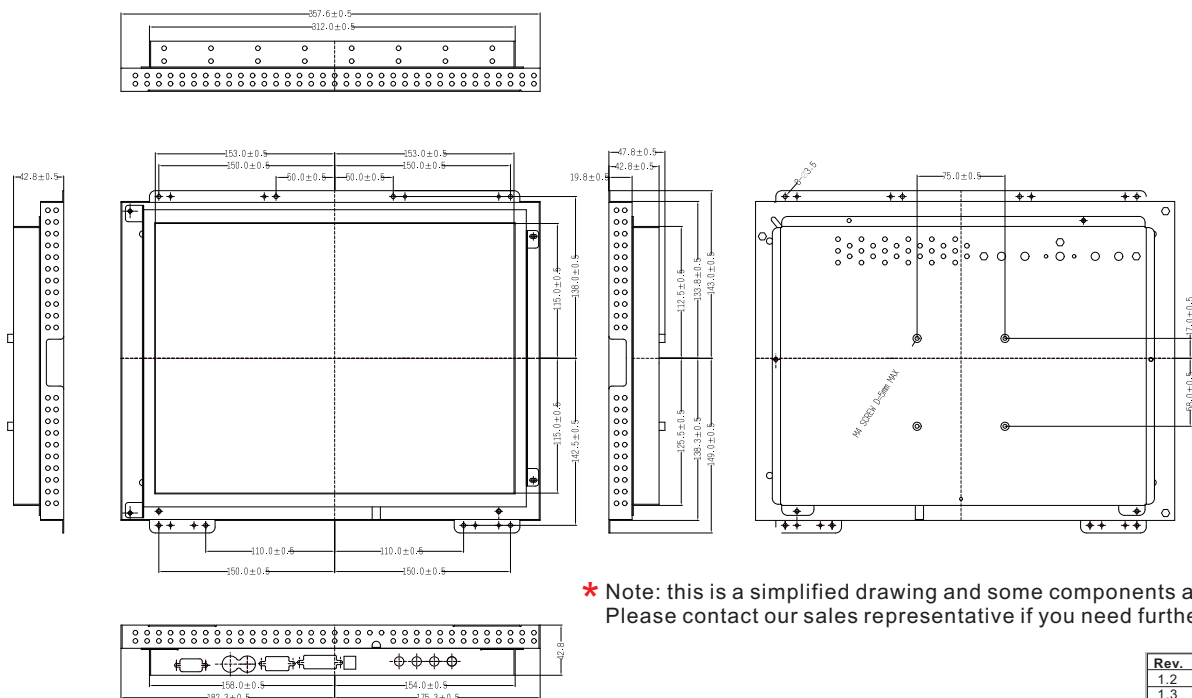

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.2	spec change	Jan-11-11
1.3	spec change	Nov-13-12
1.4	Change pic	June-13-13