


Open Frame LCD

Open Frame LCD

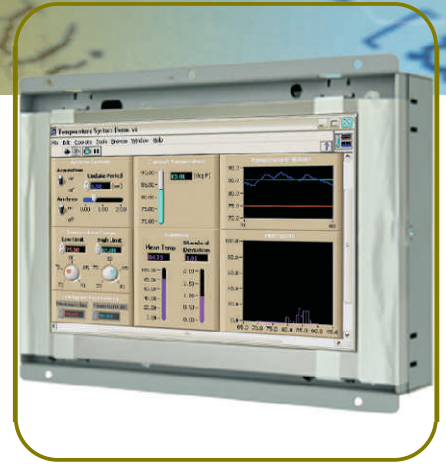


7"(16:9)

Specifications

**RoHS
COMPLIANT**
2002/95/EC

Model Name	W07T700-OFA4
Viewable Size Image	7"(16:9)
Active Display Area(mm)	152.4(H) x 91.44(V)
Pixel Pitch(mm)	0.1905(H)x 0.1905(V)
Number of Pixels	800 x 480
Color Configuration	262K(6bit) / 16.2M(8bit)
Contrast Ratio	1000:1(typ.)
Brightness(cd/m ²)	400(typ.)
Viewing Angle(CR>=10)	-80~80(H);-80~80(V)
Synchronization Range	31.5~37.5KHz / 60~75Hz
Horizontal / Vertical	
Recommended Resolution	800 x 480@60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	10W typical, normal operation
Power Management	VESA DPMS Compliant
Optional Video Input	S-Video, Composite
Plug & Play	Yes
Support Video Signal Type	NTSC/PAL
Optional DVI Input	No
Optional Touch Screen	4 Wire Resistive

Mechanical Drawing

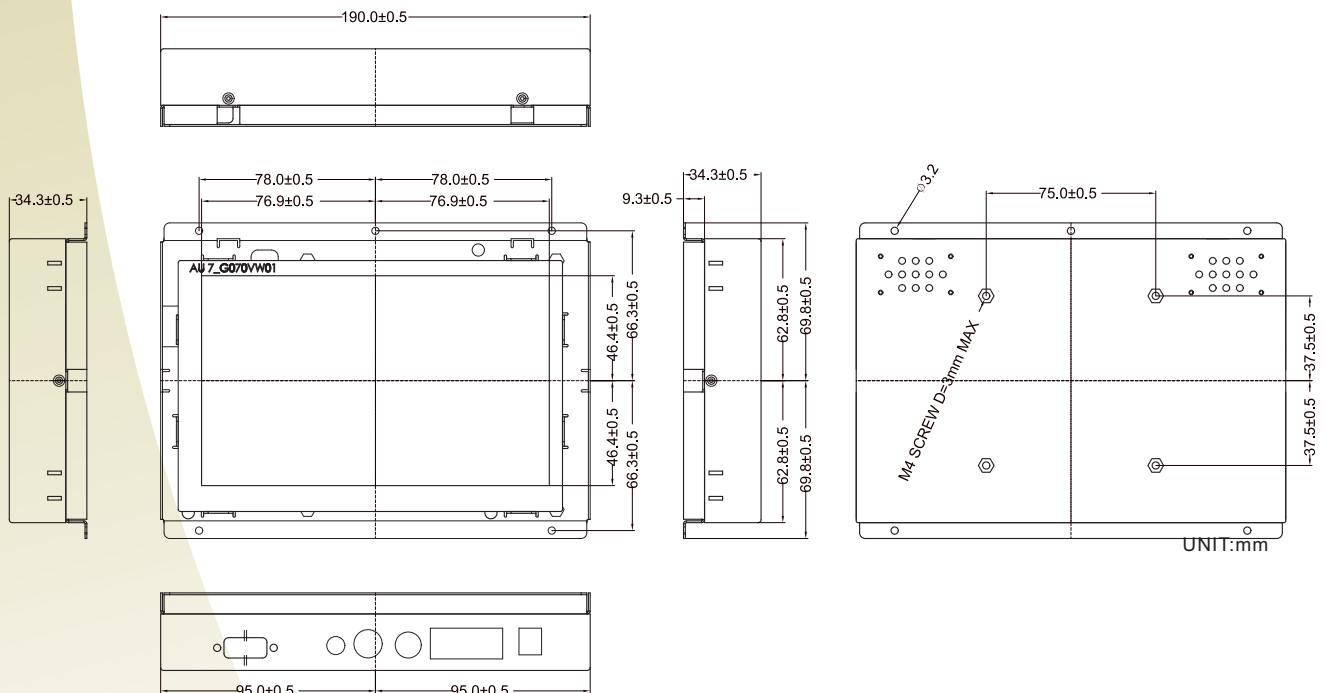

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.2	Spec change	Aug-16-11
1.3	Spec change	Nov-14-12
1.4	Pic change	Jun-03-13