

P-Cap Panel Mount LCD Front side IP65



15.6" (16:9) P-Cap LCD


Specifications

**RoHS
COMPLIANT
2002/95/EC**

Model Name	W15L100-PPA2
Viewable Size Image	15.6" (16:9)
Active Display Area (mm)	344.232 (H) x 193.536 (V)
Pixel Pitch (mm)	0.252mm x 0.252mm
Number of Pixels	1366 x 768
Contrast Ratio	500:1 (typ.)
Display Color	16.7M
Brightness (cd/m ²)	300 (typ.)
Viewing Angle (CR>=10)	-85~85 (H); -80~80 (V)
Synchronization Range Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1366x768@ 60Hz
Signal Connector	15 pin D-sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projective Capacitive multi-touch

Remarks: W15L100 series= VGA input only
W15L110 series= VGA+Video Input

Mechanical Drawing

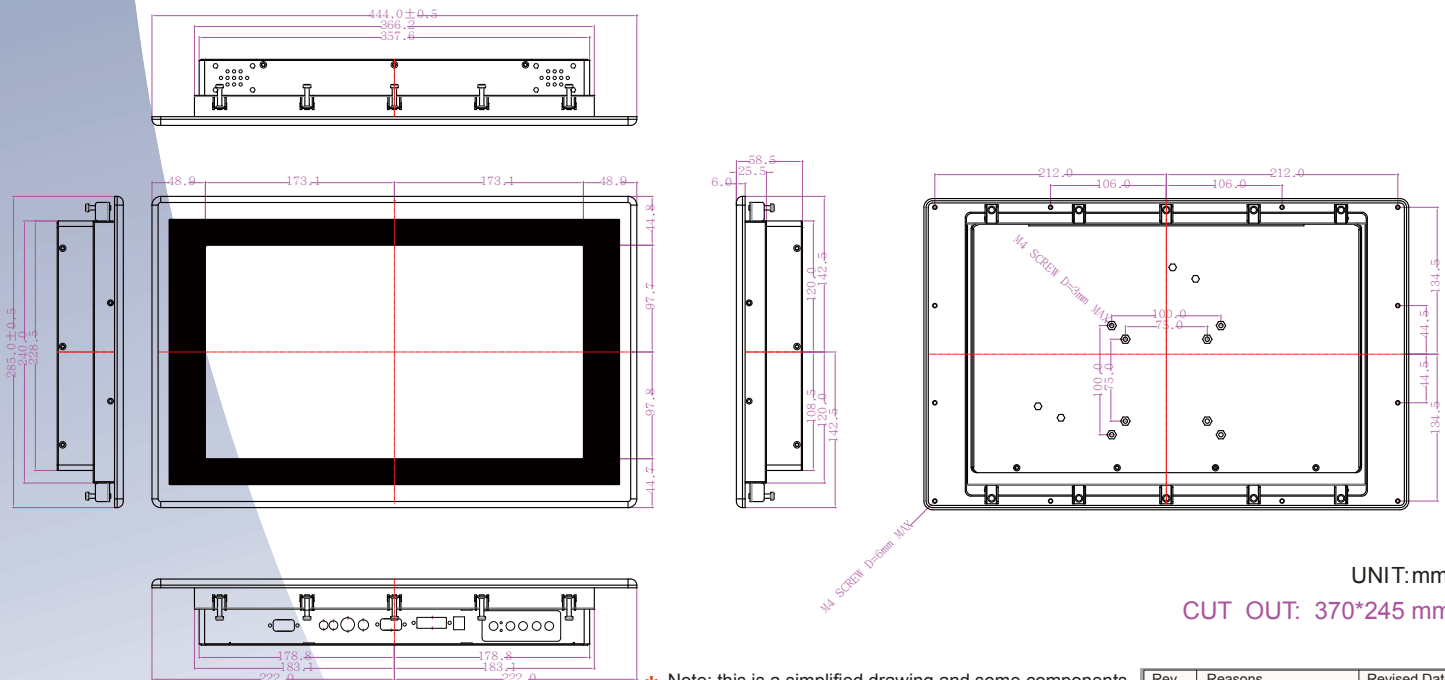

UNIT:mm

CUT OUT: 370*245 mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.1	Revise drawing	Dec-20-12
1.2	Spec Change	Sep-16-13
1.3	Add Feature	Dec-23-13