

# Open Frame LCD

## Open Frame LCD (LED Backlight)



### 32" (16:9)


#### Specifications

**RoHS**  
COMPLIANT  
2002/95/EC

Model Name	W32L300-OFA3
Viewable Size Image	32"(16:9)
Active Display Area(mm)	698.4 (H) x 392.85 (V)
Pixel Pitch(mm)	0.3637(H) x 0.3637(V)
Number of Pixels	1920x1080
Contrast Ratio	3000:1(typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m <sup>2</sup> )	350(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	
Horizontal/Vertical	47~63KHz / 60~73Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	24V DC in,with External AC to DC Adapter(100~240V AC)
Power Consumption	75W typical,normal,operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW

Remarks:W32L300 series= VGA input only  
W32L340 series= VGA+Video Input

#### Mechanical Drawing

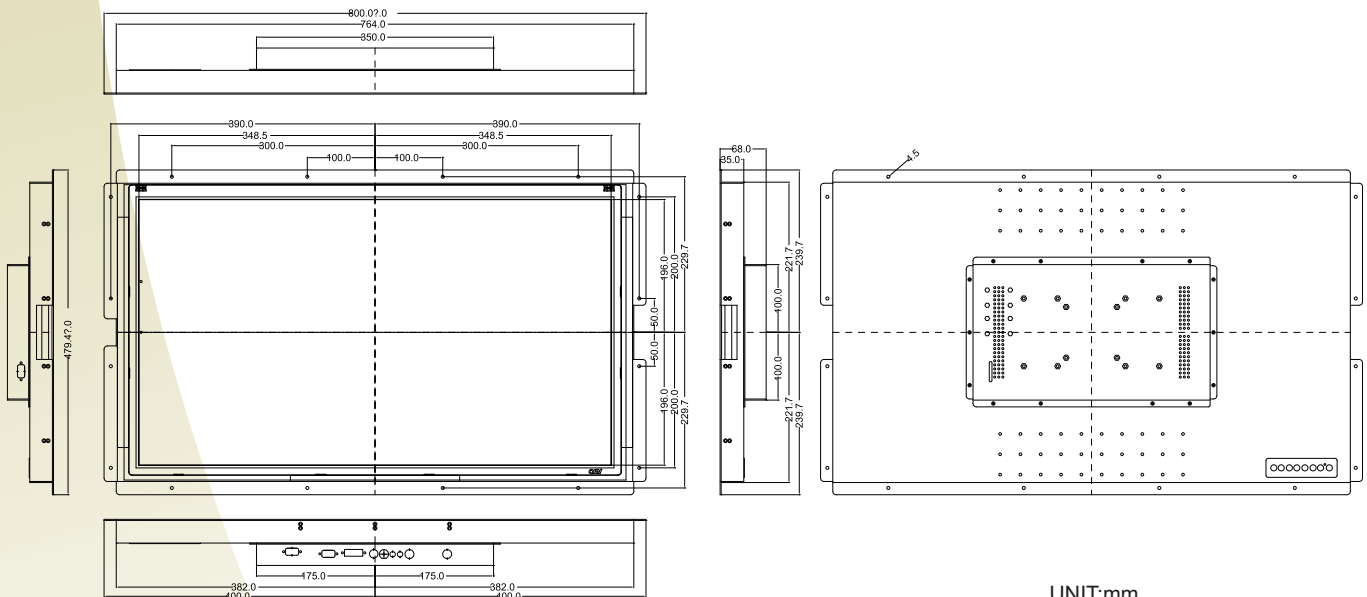

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.3	Spec change	May-16-12
1.4	Drawing Change	Nov-09-12
1.5	Pic change	Jun-03-13